


The Right Battery. The Right Price.



25.6 VOLT | 200 AMP HOUR | 5.12kWh

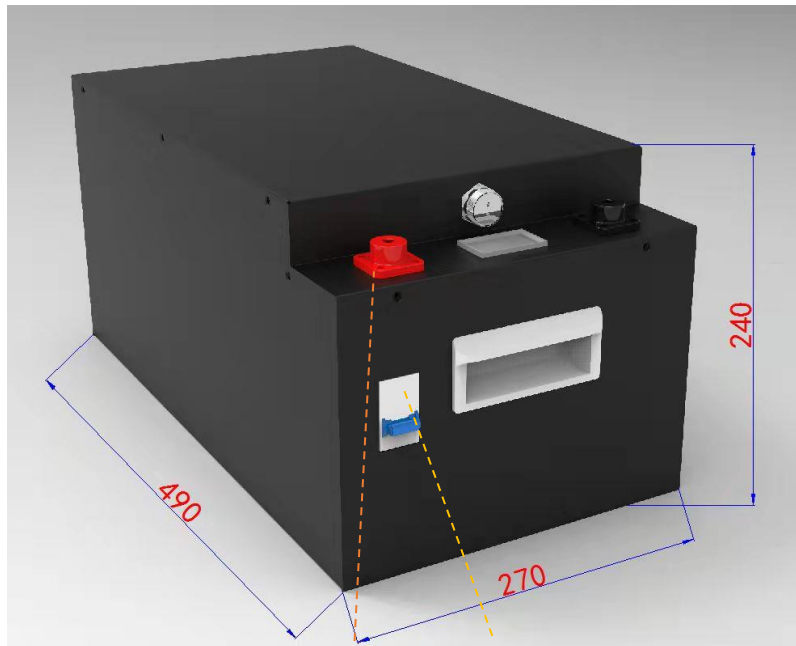

Cell Type	LiFePO4, Prismatic 200AH, 8S1P
Energy	5.12KWH
Nominal Capacity	200Ah
Nominal Voltage	25.6V
Voltage range	22.0V-29.2V
BMS (Battery Management System)	Built-in BMS-8S-150A
Charge Current	50A-100A
Continuous Discharge Current	150A
Peak Discharge Current	300A
SOC LCD Display	YES
Communication Port	RS485
Battery Case	SPCC/Metal
Dimension	490*270*240mm
Net Weight	Approx. 50kg
Operating temperature	Charging: 0°C- 60°C Discharging: -20°C- 60°C
Storage temperature	Around -20°C – 35°C
Standard environmental condition	Temperature: 25±2°C
	Humidity: 45-75%RH
	Atmospheric Pressure: 86-106 KPA



Connection Cables, Communication Cables, Protection Breaker & Heavy Duty Screw In Terminals On Every Battery.

